

Einhell Germany AG



**POWER
TOOLS**
2014/2015

Einhell
WELL DONE.

Einhell. Well done.

Based in Landau an der Isar in southern Germany, Einhell Germany AG is one of the world's leading suppliers of in-house developed and distributed solutions for DIY enthusiasts and trade professionals for use in the home, garden and for leisure purposes. For 50 years and in more than 50 countries, Einhell has provided professional expertise in its partnerships with retailers for the supply of hand-held power tools, stationary tools and machines including garden equipment and water technology.

With its tagline "Einhell® WELL DONE", Einhell can increasingly claim to be blazing a trail in the development of innovative new products and technologies that impress customers with their outstanding value for money.

As a company, Einhell focuses on generating sustainable international growth as well as reinforcing its position in the market by supplying „Brand Quality at the Best Price“.



Einhell. Brand quality and service.


- Our new multi-stage quality assurance system covers everything without exception: from audits of our production facilities around the world to our complete service for the end user.
- The Einhell RED Service covering the D/A/CH markets provides fast, all-round expert assistance and comes with a 10-year parts availability guarantee.

■ German
■ Designed
■ Quality
Einhell Germany AG



POWER TOOLS

POWER X-CHANGE			
	Power X-Change	The innovative lithium-ion battery system	4
		Cordless drill	6
		Cordless impact drill	7
		Battery-powered lamp	7
	Screwing	Cordless screwdriver	8
		Cordless drill	8
		Cordless impact drill	20
		Drywall screw gun	21
	Drilling & Mixing	Impact drills	22
		Rotary hammers	26
		Paint and mortar mixer	31
	Cutting	Angle grinders	32
	Milling & Planing	Masonry channel cutter	37
		Routers	38
		Electric planer	39
		Multi-function tools	40
	Grinding	Delta sanders	42
		Multi sanders	43
		Orbital sanders	44
		Eccentric sander	46
		Belt sander	46
	Sawing	Jigsaws	49
		All-purpose saws	53
		Hand-held circular saws	54
	Other Tools	Hot air gun	59
	Grinding and engraving tool	59	
	Service		60

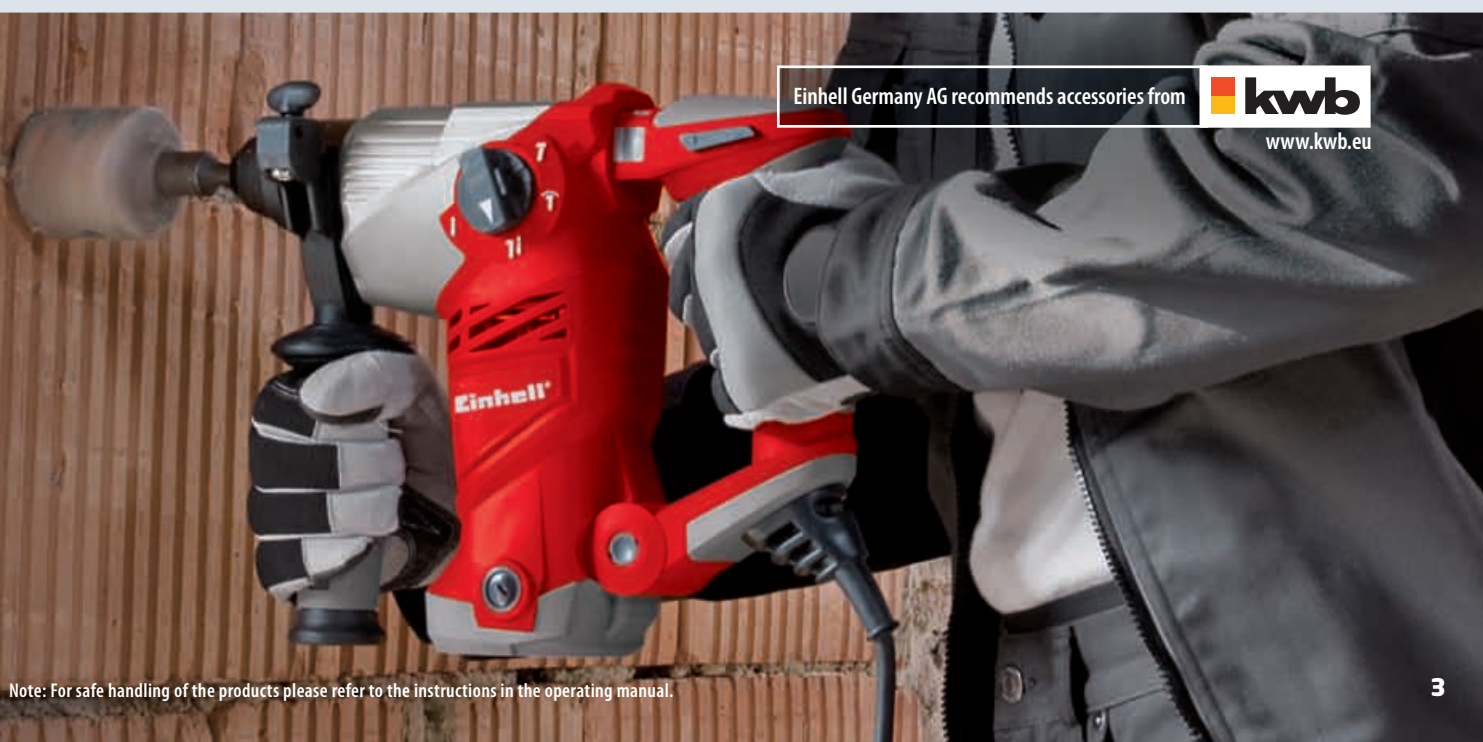

Einhell Germany AG recommends accessories from



www.kwb.eu

POWER X CHANGE®

NOW THERE'S EVEN MORE!

THE INNOVATIVE **18 V AND 36 V** LITHIUM-ION BATTERY SYSTEM FOR POWER TOOLS AND GARDEN EQUIPMENT



1.5 Ah

3.0 Ah

**NEW
5.2 Ah**

**Our most powerful yet -
for EVEN LONGER RUNNING!**

BOOSTED BY
TWIN PACK®

2 x 18 V = 36 V / 3 Ah SUPERPOWER

ONE system for workshop, home and garden

1.5 Ah



1x Power

3.0 Ah



2x Power

5.2 Ah



4x POWER

MONITORED BY

ABS Active Battery Management System



50% less charging time

Maximum performance

Maximum battery life

Maximum safety



Multifunctional - one system for numerous applications!

From simple jobs to power-intensive applications: Power X-Change covers a spectrum of applications which is as comprehensive as the Einhell product range. It is this multifunctionality that makes the Power X-Change battery system so special and lets you work spontaneously at any time, unhindered by cable, with complete freedom of movement.



Combinable - always the power that's needed!

Einhell's Twin-Pack technology lets you operate both 18 V and power-hungry 36 V tools - our 36 V lawn mower, for example, is powered by two 18 V battery packs with two battery packs operating in the appliance at the same time. However, they can also be used individually in all our other 18 V Power X-Change tools. So there's no need to spend a lot of money on more 36 V battery packs. Depending on how long you'd like to run your tool, our Power X-Change System offers you a choice of 1.5 Ah, 3 Ah and - for maximum staying power - 5.2 Ah battery packs. You'll have maximum flexibility for all your requirements using the Einhell Power X-Change Program in combination with the variable 18 V and 36 V system.



Economical - protects your wallet and the environment!

With Power X-Change there is no need to buy additional batteries for subsequent products. This not only saves you a lot of money but also conserves valuable environmental resources. Similarly it also puts an end to the unnecessary use of so many battery chargers, which is not only good for the environment but also saves you storage space. The only thing you won't miss with Power X-Change is modern and forward-looking technology.

THE EINHELL POWER X-CHANGE SYSTEM



For garden products and tools.

The Power X-Change System can be used with many Einhell products. Take advantage of Einhell's brand strength, portfolio expertise and annual launch of new products with replaceable lithium-ion battery packs.

The latest Power X-Change power tools:



■ LITHIUM-ION CORDLESS DRILL
TE-CD 18 Li
Page 6



■ LITHIUM-ION CORDLESS IMPACT DRILL
TE-CD 18-2 Li-i
Page 7



■ LITHIUM-ION LED LAMP
TE-CL 18 Li
Page 7

The latest Power X-Change garden tools:

■ LITHIUM-ION GRASS TRIMMER
GE-CT 18 Li



■ LITHIUM-ION HEDGE TRIMMER
GE-CH 1846 Li
GE-CH 1855 Li



■ LITHIUM-ION LEAF BLOWER
GE-CL 18 Li



■ LITHIUM-ION LAWN MOWER
GE-CM 36 Li



POWER X CHANGE®

FAMILY

CORDLESS DRILL
TE-CD 18 Li - Solo
 Item identical to TE-CD 18 Li,
 but battery pack and charger
 not included



Art. No. 45.136.92
 PU 8
 EAN code



CORDLESS IMPACT DRILL
TE-CD 18-2 Li-i - Solo
 Item identical to TE-CD 18-2 Li-i,
 but battery pack and charger
 not included



Art. No. 45.138.02
 PU 1
 EAN code



POWER X-CHANGE
 1.5 Ah system battery



Art. No. 45.113.40
 PU 12
 EAN code



POWER X-CHANGE
 3.0 Ah system battery



Art. No. 45.113.41
 PU 12
 EAN code



POWER X-CHANGE
 5.2 Ah system battery



Art. No. 45.113.57
 PU 12
 EAN code



POWER X-CHARGER
 18 V system fast charger



Art. No. 45.120.11
 PU 8
 EAN code



CORDLESS DRILL TE-CD 18 Li

More information about
 this article



Scan in the QR Code




POWER X CHANGE




Battery pack	18 V / 1500 mAh
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min ⁻¹ / 0 – 1350 min ⁻¹
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	30 min
Standard accessories	Transport and storage case, 30 min fast charger
Net weight gross weight	1.5 kg 3.7 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.136.90
EAN code	



30 min fast charger



Direction indicator



Handy belt clip



Battery technology with Einhell ABS

CORDLESS IMPACT DRILL
TE-CD 18-2 Li-i

BATTERY-POWERED LAMP
TE-CL 18 Li



More information about this article



Scan in the QR Code

POWER X CHANGE



Battery pack	18 V / 1500 mAh
Torque	48 Nm
Gears	2-speed gearbox
Speed	0 – 320 min ⁻¹ / 0 – 1350 min ⁻¹
Torque selector settings	23 + 1 + 1
Drill chuck	13 mm (single sleeve)
Charging time	30 min
Standard accessories	Additional handle, transport and storage case, metal depth stop, 30 min fast charger
Net weight gross weight	1.8 kg 4.0 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.138.00
EAN code	

More information about this article



Scan in the QR Code



POWER X CHANGE

Battery pack	Compatible with Power X-Change
Light source	3 high-performance LEDs
Luminosity	270 lumens
Burn time	8 h (1.5 Ah) 16 h (3.0 Ah) 32 h (5.2 Ah)
Net weight gross weight	0.16 kg 0.25 kg
Packing dimensions	120 x 155 x 85 mm
Packaging unit	20
Article number	45.141.10
EAN code	



3 FUNCTIONS
Screw fixings, drilling, hammer drilling



Large 13 mm keyless chuck



Ultra-long burn time (up to 32 hrs)




Adjustable cone of light



Handy belt clip



Battery technology with Einhell ABS

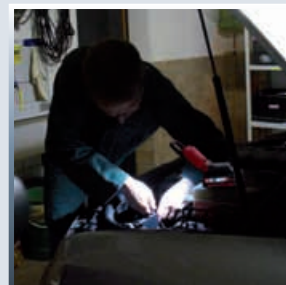


Variable angle adjustment




High luminosity

CORDLESS SCREWDRIVER
RT-SD 3,6/1 Li



Battery pack	3.6 V / 1500 mAh
Speed	200 min ⁻¹
Torque	3.5 Nm
Charging time	3 h
Standard accessories	9 bits, charger station with bit depot, charging supply unit
Net weight gross weight	0.4 1.0 kg
Packing dimensions	245 x 190 x 90 mm
Packaging unit	10
Article number	45.134.90
EAN code	

CORDLESS DRILL
TH-CD 12 Li



Battery pack	12 V / 1300 mAh
Torque	22 Nm
Gears	1-speed gearbox
Speed	0 – 400 min ⁻¹
Torque selector settings	19 + 1
Drill chuck	10 mm
Charging time	3 – 5 h
Net weight gross weight	1.0 kg 1.6 kg
Packing dimensions	250 x 200 x 90 mm
Packaging unit	10
Article number	45.136.50
EAN code	



+ 30% capacity



Turnable handle



Ergonomic softgrip



Keyless chuck



Torque selector settings



Charger station



20-step torque selector



Magnetic bit/screw holder

CORDLESS DRILL
TH-CD 12-2 Li



Battery pack	12 V / 1300 mAh
Torque	24 Nm
Gears	2-speed gearbox
Speed	0 – 350 min ⁻¹ / 0 – 1300 min ⁻¹
Torque selector settings	19 + 1
Drill chuck	10 mm (single sleeve)
Charging time	3 – 5 h
Standard accessories	Transport and storage case
Net weight gross weight	1.0 kg 2.5 kg
Packing dimensions	305 x 290 x 102 mm
Packaging unit	5
Article number	45.136.60
EAN code	



2-speed gear: for drilling and screw fixings



**AUTO LOCK &
 QUICK STOP**

Easy tool-change



20-step torque selector



Ergonomic softgrip



Lithium-ion-technology from Einhell

Lithium-ion cells have the same capacity as those made from nickel-cadmium, yet are much smaller. This is why Einhell products with lithium-ion batteries are much lighter and easier to handle than tools with conventional batteries.

Special protection features ensure safe operation and long battery life; over- and undervoltages are avoided and the temperature of each cell is monitored continuously. Even after long periods of nonuse, full power is ensured thanks to minimal self-discharge.

Incidentally: Einhell lithium-ion batteries can be charged without any memory effect, regardless of their current charge level!

CORDLESS SCREWDRIVER
RT-SD 3,6/1 Li Kit

Item identical to RT-SD 3,6/1 Li,
 but aluminum case included



Art. No. 45.134.91

PU 10

EAN code



BIT-SET

23 pieces



Art. No. 42.580.73

PU 72

EAN code



CORDLESS DRILL
TH-CD 14,4-2 Li



Battery pack	14.4 V / 1300 mAh
Torque	33 Nm
Gears	2-speed gearbox
Speed	0 – 350 min ⁻¹ / 0 – 1150 min ⁻¹
Torque selector settings	19 + 1
Drill chuck	10 mm (single sleeve)
Charging time	3 – 5 h
Standard accessories	Transport and storage case
Net weight gross weight	1.4 kg 2.7 kg
Packing dimensions	305 x 290 x 102 mm
Packaging unit	5
Article number	45.136.70
EAN code	

CORDLESS DRILL
TH-CD 18-2 Li



Battery pack	18 V / 1300 mAh
Torque	40 Nm
Gears	2-speed gearbox
Speed	0 – 350 min ⁻¹ / 0 – 1150 min ⁻¹
Torque selector settings	19 + 1
Drill chuck	10 mm (single sleeve)
Charging time	3 – 5 h
Standard accessories	Transport and storage case
Net weight gross weight	1.5 kg 2.8 kg
Packing dimensions	305 x 290 x 102 mm
Packaging unit	5
Article number	45.136.80
EAN code	



2-speed gear: for drilling and screw fixings



AUTO LOCK & QUICK STOP

Easy tool-change



2-speed gear: for drilling and screw fixings



AUTO LOCK & QUICK STOP

Easy tool-change



Ergonomic softgrip



Robust metal gearbox



Ergonomic softgrip



Robust metal gearbox

CORDLESS DRILL
RT-CD 10,8 Li KIT



Battery pack	10.8 V / 1300 mAh
Torque	25 Nm
Gears	2-speed gearbox
Speed	0 – 350 / 0 – 1200 min ⁻¹
Torque selector settings	17 + 1
Drill chuck	10 mm (single sleeve)
Charging time	1 h
Standard accessories	1 h fast charger, LED lamp, 30 bits, 1 bitholder, case, 2 Battery packs
Net weight gross weight	1.0 kg 3.6 kg
Packing dimensions	325 x 105 x 375 mm
Packaging unit	5
Article number	45.131.88
EAN code	



Einhell Germany AG



2-speed gearbox



Slim housing with soft grip



Single-sleeve drill chuck with spindle lock



1 h fast charger with Einhell ABS

CORDLESS DRILL
TH-CD 14,4-2 2B Li
 Identical to TH-CD 14,4-2 Li,
 but with second battery pack



Art. No. 45.136.71

PU 5

EAN code



CORDLESS DRILL
TH-CD 18-2 2B Li
 Identical to TH-CD 18-2 Li,
 but with second battery pack



Art. No. 45.136.81

PU 5

EAN code



CORDLESS SCREWDRIVER

TE-CD 12 Li

CORDLESS DRILL

TE-CD 12 X-Li

More information about this article



Scan in the QR Code



Battery pack	12 V / 1300 mAh
Torque	25 Nm
Gears	2-speed gearbox
Speed	0 – 350 min ⁻¹ / 0 – 1300 min ⁻¹
Torque selector settings	17 + 1
Drill chuck	10 mm (single sleeve)
Charging time	1 h
Standard accessories	Transport and storage case, 1 h fast charger
Net weight gross weight	1.0 kg 2.2 kg
Packing dimensions	330 x 265 x 95 mm
Packaging unit	5
Article number	45.136.00
EAN code	


Battery pack	12 V / 1300 mAh
Torque	25 Nm
Gears	2-speed gearbox
Speed	0 – 350 min ⁻¹ / 0 – 1300 min ⁻¹
Torque selector settings	17 + 1
Drill chuck	10 mm (single sleeve), removable
Charging time	1 h
Standard accessories	2nd battery pack, 10 bits, transport and storage case, removable drill chuck, 1 h fast charger
Net weight gross weight	1.0 kg 2.3 kg
Packing dimensions	330 x 265 x 95 mm
Packaging unit	5
Article number	45.136.03
EAN code	



2-speed high-performance gearbox



Single-sleeve drill chuck with spindle lock

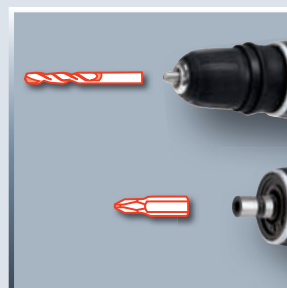

Small and easy to use with removable chuck




2-speed high-performance gearbox



Short, ergonomic design



1 h fast charger with Einhell ABS

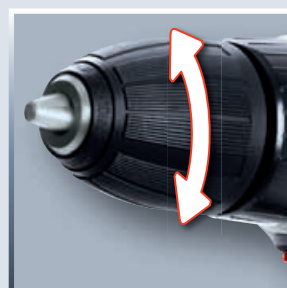

Single-sleeve drill chuck with quick stop



1 h fast charger with Einhell ABS

CORDLESS DRILL
RT-CD 14,4/1 Li



DE: price/performance "Very Good/Good"



DE: rating "Good" | Test winner price/performance



Battery pack	14.4 V / 1300 mAh
Torque	38 Nm
Gears	2-speed gearbox
Speed	0 – 310 / 0 – 1300 min ⁻¹
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	1 h
Standard accessories	Transport and storage case, 1 h fast charger
Net weight gross weight	1.4 kg 3.7 kg
Packing dimensions	380 x 110 x 340 mm
Packaging unit	4
Article number	45.132.95
EAN code	



Direction indicator



Battery capacity indicator



90° stop faces

ABS by Einhell

 Li-Ion Compact & Light Weight	 Fast Charger
 SAFE	 LONG LIFE incl. repair mode

Active Battery Management System

1 h fast charger with Einhell ABS



Einhell Germany AG

CORDLESS SCREWDRIVER
TE-CD 12 Li

Identical to TE-CD 12 Li, but with second battery pack



Art. No. 45.136.02

PU 5

EAN code



CORDLESS DRILL
RT-CD 14,4/1 Li

Identical to RT-CD 14,4/1 Li, but with second battery pack



Art. No. 45.132.98

PU 4

EAN code



BIT-SET
23 pieces



Art. No. 42.580.73

PU 72

EAN code



DRILL AND BIT KIT
70 pieces



Art. No. 42.580.85

PU 10


EAN code





CORDLESS DRILL
TH-CD 12



Battery pack	12 V / 1100 mAh
Speed	0 – 550 min ⁻¹
Torque	12 Nm
Charging time	3 – 5 h
Gears	1-speed gearbox
Drill chuck	10 mm (single sleeve)
Net weight gross weight	1.4 kg 1.9 kg
Packing dimensions	200 x 250 x 90 mm
Packaging unit	10
Article number	45.135.25
EAN code	 4 006825 583328



Slim ergonomic design



Soft grip



Quickstop



Magnetic bit-/ screw holder

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS DRILL
TH-CD 12-2



Battery pack	12 V / 1100 mAh
Speed	0 – 350 / 0 – 1100 min ⁻¹
Torque	14 Nm
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm (single sleeve)
Standard accessories	Transport and storage case
Net weight gross weight	1.5 kg 2.9 kg
Packing dimensions	290 x 305 x 115 mm
Packaging unit	5
Article number	45.135.20
EAN code	

CORDLESS DRILL
TH-CD 14,4 2B



Battery pack	14.4 V / 1100 mAh
Speed	0 – 550 min ⁻¹
Torque	18 Nm
Charging time	3 – 5 h
Gears	1-speed gearbox
Drill chuck	10 mm (single sleeve)
Standard accessories	2nd battery pack
Net weight gross weight	1.5 kg 2.6 kg
Packing dimensions	230 x 250 x 90 mm
Packaging unit	5
Article number	45.135.40
EAN code	




2 speed gear box



Soft grip



Slim ergonomic design



Soft grip



Quickstop



Magnetic bit-/ screw holder



Quickstop





Magnetic bit-/ screw holder

CORDLESS DRILL
TH-CD 14,4-2

CORDLESS DRILL
TH-CD 18-2



Battery pack	14.4 V / 1200 mAh
Speed	0 – 350 / 0 – 1100 min ⁻¹
Torque	24 Nm
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm (single sleeve)
Standard accessories	Transport and storage case
Net weight gross weight	1.6 kg 3.4 kg
Packing dimensions	280 x 305 x 103 mm
Packaging unit	5
Article number	45.135.30
EAN code	 4 006825 581553


Battery pack	18 V / 1200 mAh
Speed	0 – 350 / 0 – 1100 min ⁻¹
Torque	30 Nm
Charging time	3 – 5 h
Gears	2-speed gearbox
Drill chuck	10 mm (single sleeve)
Standard accessories	Transport and storage case
Net weight gross weight	1.7 kg 3.1 kg
Packing dimensions	280 x 305 x 103 mm
Packaging unit	5
Article number	45.135.45
EAN code	 4 006825 582369



2-speed high-performance gearbox




High-torque motor



2-speed high-performance gearbox




High-torque motor



Quickstop



Soft grip



Quickstop



Battery capacity indicator


CORDLESS DRILL
TH-CD 18-2 1h



Battery pack	18 V / 1200 mAh
Speed	0 – 350 / 0 – 1100 min ⁻¹
Torque	30 Nm
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	10 mm (single sleeve)
Standard accessories	2nd battery pack, transport and storage case, 1 h fast charger
Net weight gross weight	1.7 kg 4.3 kg
Packing dimensions	390 x 315 x 105 mm
Packaging unit	5
Article number	45.135.55
EAN code	



1h fast charger



2-speed high-performance gearbox



Battery capacity indicator



High-torque motor

CORDLESS DRILL
TH-CD 14,4-2 2B
 Identical to TH-CD 14,4-2,
 but with second battery pack



Art. No. 45.135.35
 PU 5
 EAN code



CORDLESS DRILL
TH-CD 18-2 2B
 Identical to TH-CD 18-2,
 but with second battery pack



Art. No. 45.135.50
 PU 5
 EAN code



BIT-SET
 23 pieces



Art. No. 42.580.73
 PU 72
 EAN code



DRILL AND BIT KIT
 70 pieces



Art. No. 42.580.85
 PU 10
 EAN code




Einhell Germany AG



CORDLESS DRILL
RT-CD 14,4/1



Battery pack	14.4 V / 1500 mAh
Torque	36 Nm
Gears	2-speed gearbox
Speed	0 – 310 / 0 – 1300 min ⁻¹
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	1 h
Standard accessories	2nd battery pack, 1h fast charger, case
Net weight gross weight	1.7 kg 4.6 kg
Packing dimensions	380 x 340 x 110 mm
Packaging unit	4
Article number	45.132.15
EAN code	 4 006825 573961




Battery capacity indicator



Single-sleeve drill chuck with spindle lock



2-speed gearbox



90° stop faces

Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS DRILL
RT-CD 18/1




Battery pack	18 V / 1500 mAh
Torque	44 Nm
Gears	2-speed gearbox
Speed	0 – 320 / 0 – 1350 min ⁻¹
Torque selector settings	23 + 1
Drill chuck	10 mm (single sleeve)
Charging time	1 h
Standard accessories	2nd battery pack, 1h fast charger, case
Net weight gross weight	1.9 kg 5.0 kg
Packing dimensions	380 x 340 x 110 mm
Packaging unit	4
Article number	45.132.75
EAN code	



High torque motor



Robust metal gearbox



Precision electronics



2-speed gearbox



Einhell Germany AG



BIT-SET
 23 pieces



Art. No. 42.580.73
 PU 72
 EAN code



DRILL AND BIT KIT
 70 pieces




Art. No. 42.580.85
 PU 10
 EAN code




CORDLESS IMPACT DRILL
TH-CD 18-2 i

CORDLESS IMPACT DRILL
TE-CD 18-2 i




Battery pack	18 V / 1200 mAh
Speed	0 – 300 min ⁻¹ / 0 – 900 min ⁻¹
Torque	30 Nm
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	13 mm
Standard accessories	2nd battery pack, transport and storage case, 1 h fast charger
Net weight gross weight	2.0 kg 4.5 kg
Packing dimensions	390 x 315 x 105 mm
Packaging unit	5
Article number	45.135.62
EAN code	 4 006825 594393


Battery pack	18 V / 1500 mAh
Speed	0 – 320 min ⁻¹ / 0 – 1350 min ⁻¹
Torque	44 Nm
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	13 mm (single sleeve)
Standard accessories	2nd battery pack, transport and storage case, 1 h fast charger
Net weight gross weight	2.2 kg 5.1 kg
Packing dimensions	420 x 335 x 105 mm
Packaging unit	4
Article number	45.137.90
EAN code	 4 006825 596427



Also suitable for drilling into masonry

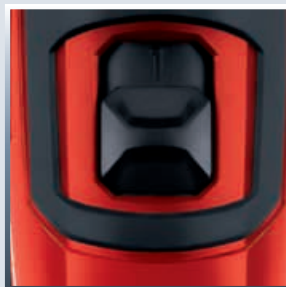

2-speed metal gearbox



Also suitable for drilling into masonry



Quick and easy tool-change



QUICK STOP
Quick and easy tool-change



Battery capacity indicator



High torque motor



Battery capacity indicator

CORDLESS IMPACT DRILL
TH-CD 24-2 i



Battery pack	24 V / 1200 mAh
Speed	0 – 350 / 0 – 1100 min ⁻¹
Torque	48 Nm
Charging time	1 h
Gears	2-speed gearbox
Drill chuck	13 mm
Standard accessories	2nd battery pack, transport and storage case, 1 h fast charger
Net weight gross weight	2.3 kg 5.3 kg
Packing dimensions	390 x 350 x 115 mm
Packaging unit	5
Article number	45.135.70
EAN code	


DRYWALL SCREW GUN
TH-DY 500 E



Mains connection	230 V ~ 50 Hz
Power rating	500 W
Speed	0 – 2200 min ⁻¹
Tool chuck	6.35 mm (1/4") internal hexagon
Net weight gross weight	1.9 kg 2.1 kg
Packing dimensions	300 x 255 x 75 mm
Packaging unit	5
Article number	42.599.05
EAN code	



Impact function

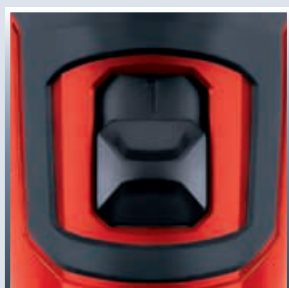


2-speed high-performance gearbox



Robust aluminium gear head




Precise screw depth adjustment

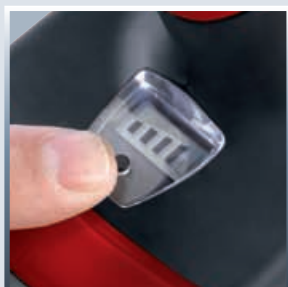

Battery capacity indicator



High-torque motor

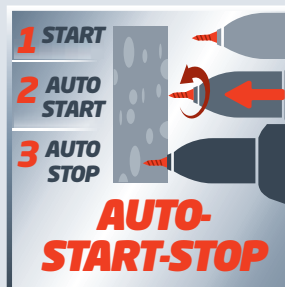

Auto start/stop gearing




Handy belt clip



CORDLESS IMPACT DRILL
TH-ID 720/1 €



Mains connection	230 – 240 V ~ 50 Hz
Power rating	720 W
Gears	1-speed gearbox
Speed	0 – 2700 min ⁻¹
Drilling capacity (wood/concrete/steel)	30 / 13 / 10 mm
Blow rate	0 – 43200 min ⁻¹
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle
Net weight gross weight	2.1 kg 2.4 kg
Packing dimensions	325 x 240 x 80 mm
Packaging unit	5
Article number	42.598.19
EAN code	



Quick chuck with locking function



Additional handle with anti-twist protection



Electronic speed control




Large ergonomic soft grip surfaces


Note: For safe handling of the products please refer to the instructions in the operating manual.

CORDLESS IMPACT DRILL
TH-ID 1000 €

CORDLESS IMPACT DRILL
TE-ID 500 €




Mains connection	230 V ~ 50 Hz
Power rating	1010 W
Gears	1-speed gearbox
Speed	0 – 3000 min ⁻¹
Drilling capacity (wood/concrete/steel)	32 / 16 / 13 mm
Blow rate	0 – 48000 min ⁻¹
Drill chuck	13 mm
Standard accessories	Metal depth stop, additional handle
Net weight gross weight	2.2 kg 2.6 kg
Packing dimensions	310 x 260 x 138 mm
Packaging unit	8
Article number	42.598.25
EAN code	

Mains connection	230 – 240 V ~ 50 Hz
Power rating	500 W
Gears	1-speed gearbox
Speed	0 – 3000 min ⁻¹
Drilling capacity (wood/concrete/steel)	25 / 10 / 8 mm
Blow rate	0 – 48000 min ⁻¹
Drill chuck	10 mm
Standard accessories	Metal depth stop, additional handle, transport and storage case
Net weight gross weight	2.0 kg 3.1 kg
Packing dimensions	310 x 250 x 75 mm
Packaging unit	4
Article number	42.596.10
EAN code	



Robust metal drill chuck

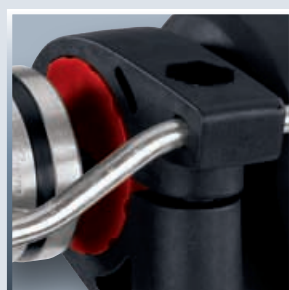

Additional handle with anti-twist protection



Quality chuck with locking function



Small easy-to-use design




Electronic speed control



Large ergonomic soft grip surfaces



Large ergonomic soft grip surfaces



Simple speed setting control

IMPACT DRILL
RT-ID 65



Mains connection	230 – 240 V ~ 50 Hz
Power rating	650 W
Gears	1-speed gearbox
Speed	0 – 3000 min ⁻¹
Drilling capacity (wood/concrete/steel)	25 / 13 / 10 mm
Blow rate	0 – 48000 min ⁻¹
Drill chuck	13 mm
Standard accessories	Metal depth stop, case, additional handle
Net weight gross weight	2.1 kg 3.7 kg
Packing dimensions	340 x 348 x 120 mm
Packaging unit	5
Article number	42.597.35
EAN code	

CORDLESS IMPACT DRILL
TE-ID 750 E




Mains connection	230 – 240 V ~ 50 Hz
Power rating	750 W
Gears	1-speed gearbox
Speed	0 – 3000 min ⁻¹
Drilling capacity (wood/concrete/steel)	30 / 14 / 12 mm
Blow rate	0 – 48000 min ⁻¹
Drill chuck	13 mm
Standard accessories	Dust extraction device, metal depth stop, additional handle, transport and storage case
Net weight gross weight	2.3 kg 4.1 kg
Packing dimensions	370 x 330 x 110 mm
Packaging unit	4
Article number	42.596.70
EAN code	



Quality chuck and spindle lock



Transport and storage case



Dust-free drilling



Drill bits easy to change



Additional handle with drill bit depot



Integrated LED light



Simple speed setting control



Additional handle with anti-twist protection

HAMMER DRILL
WITH CONSTANT ELECTRONIC CONTROL SYSTEM

TE-ID 1050 CE



More information about
this article



Scan in the QR Code



Mains connection	230 V ~ 50 Hz
Power rating	1050 W
Gears	2-speed gearbox
Speed	0 – 1000 min ⁻¹ / 0 – 2800 min ⁻¹
Drilling capacity (wood/concrete/steel)	40 / 16 / 13 mm
Blow rate	0 – 15000 min ⁻¹ / 0 – 42000 min ⁻¹
Drill chuck	13 mm
Standard accessories	Dust extraction device, metal depth stop, additional handle, transport and storage case
Net weight gross weight	3.0 kg 5.2 kg
Packing dimensions	410 x 330 x 120 mm
Packaging unit	2
Article number	42.596.20
EAN code	



Dust-free drilling



2-speed gear – screwing and drilling



Electronically controlled – constant speed even under load, for perfect drill holes



Additional handle with anti-twist protection



Einhell Germany AG

CORDLESS IMPACT DRILL TE-ID 750/1 E

Item identical to TE-ID 750 E,
but dust extraction system
not included



Art. No. 42.596.71

PU 4

EAN code



CORDLESS IMPACT DRILL TE-ID 1050/1 CE

Item identical to TE-ID 1050 CE
but dust extraction system
not included



Art. No. 42.596.21

PU 2

EAN code



DRILL AND BIT KIT

70 pieces



Art. No. 42.580.85


PU 10

EAN code



ROTARY HAMMER
TH-RH 800 E




Mains connection	230 – 240 V ~ 50 Hz
Power rating	800 W
Speed	0 – 1000 min ⁻¹
Blow rate/-strength	0 – 5180 min ⁻¹ / 2.5 J
Drilling capacity (concrete)	26 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, storage case
Net weight gross weight	3.3 kg 5.2 kg
Packing dimensions	400 x 280 x 104 mm
Packaging unit	3
Article number	42.579.20
EAN code	 4 006825 581522



4 functions



Speed control electronics with r/l run



Safety slip coupling



Hand guard

ROTARY HAMMER RT-RH 20



Mains connection	220 – 240 V ~ 50 Hz
Power rating	600 W
Speed	0 – 1200 min ⁻¹
Blow rate/strength	0 – 5800 min ⁻¹ / 1.8 J
Drilling capacity (concrete)	20 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, case
Net weight gross weight	2.8 kg 4.5 kg
Packing dimensions	380 x 365 x 118 mm
Packaging unit	3
Article number	42.584.25
EAN code	



Einhell Germany AG




4 functions



Speed control electronics with r/l run



Metal depth stop



Cable clip

SDS-PLUS DRILL BIT AND CHISEL KIT

12 pieces



Art. No. 42.580.90

PU 6

EAN code



ROTARY HAMMER
TH-RH 900/1

ROTARY HAMMER
TH-RH 1600




Mains connection	220 – 240 V ~ 50 Hz
Power rating	900 W
Speed	850 min ⁻¹
Blow rate/strength	4100 min ⁻¹ / 3 J
Drilling capacity concrete	26 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, transport and storage case, dust cap
Net weight gross weight	4.3 kg 6.0 kg
Packing dimensions	402 x 305 x 127 mm
Packaging unit	2
Article number	42.582.37
EAN code	


Mains connection	230 – 240 V ~ 50 Hz
Power rating	1600 W
Speed	800 min ⁻¹
Blow rate/strength	3900 min ⁻¹ / 4 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, transport and storage case, dust cap
Net weight gross weight	5.6 kg 7.8 kg
Packing dimensions	440 x 365 x 130 mm
Packaging unit	2
Article number	42.584.78
EAN code	



Sturdy durable design

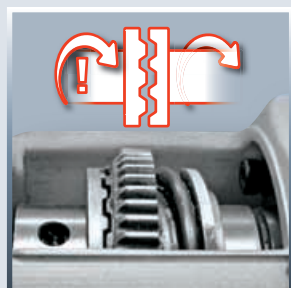

Safety slip coupling



Sturdy durable design




Vibration-absorbing handle




Additional handle with anti-twist protection



3 functions



Safety slip coupling



4 functions

ROTARY HAMMER RT-RH 26



Mains connection	220 – 240 V ~ 50 Hz
Power rating	900 W
Speed	0 – 1020 min ⁻¹
Blow rate/strength	0 – 4800 min ⁻¹ / 2.6 J
Drilling capacity (concrete)	26 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, transport and storage case
Net weight gross weight	4.7 kg 6.1 kg
Packing dimensions	410 x 130 x 330 mm
Packaging unit	3
Article number	42.584.35
EAN code	



4 functions



Vibration-absorbing handle
(with press control)



Additional handle with anti-twist protection



Speed control electronics with r/l run

SDS-PLUS DRILL BIT AND CHISEL KIT 12 pieces



Art. No. 42.580.90

PU 6

EAN code



ROTARY HAMMER RT-RH 32



Mains connection	230 V ~ 50 Hz
Power rating	1250 W
Speed	800 min ⁻¹
Blow rate/strength	4300 min ⁻¹ / 3.5 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus
Standard accessories	4 SDS-plus drills, 2 SDS-plus chisels, transport and storage case, additional handle, metal depth stop


Net weight gross weight	6.1 kg 10.5 kg
Packing dimensions	445 x 366 x 143 mm
Packaging unit	2
Article number	42.584.40
EAN code	

ROTARY HAMMER TE-RH 32 E



Mains connection	230 V ~ 50 Hz
Power rating	1250 W
Speed	0 – 850 min ⁻¹
Blow rate/strength	0 – 4100 min ⁻¹ / 5.0 J
Drilling capacity concrete	32 mm
Drill chuck	SDS-plus
Standard accessories	Metal depth stop, additional handle, transport and storage case


Net weight gross weight	5.7 kg 7.9 kg
Packing dimensions	445 x 370 x 130 mm
Packaging unit	2
Article number	42.579.40
EAN code	



Vibration-absorbing handle



Metal gear head and metal depth stop

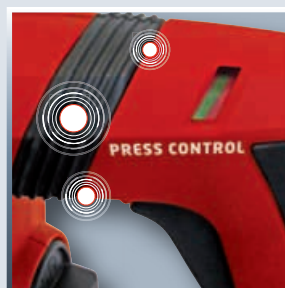

Vibration absorption with press control



Electronic control system for gentle drilling




Transport and storage case



Rotate stop (with chisel fixing)



Wear indicator to protect the motor



4 functions

PAINT AND MORTAR MIXER
RT-MX 1600 E




Mains connection	230 V ~ 50 Hz
Power rating	1600 W
Gears	2-speed gearbox
Speed	180 – 460 / 300 – 700 min ⁻¹
Mixing tool mount	M 14
Standard accessories	1 spiral mixing tool Ø 160 mm, 2 open-ended spanners

Net weight gross weight	4.6 kg 6.5 kg
Packing dimensions	445 x 275 x 330 mm
Packaging unit	2
Article number	42.585.70
EAN code	



Einhell Germany AG



Soft grip



Soft start



Incl. 1 spiral mixing tool Ø 160 mm



Speed controller


MIXER KIT M14
 2 pieces
 for bitumen, epoxide,
 adhesive und mortar, plaster



Art. No. 42.583.65
 PU 4
 EAN code



ANGLE GRINDER
RT-AG 115



Mains connection	230 V ~ 50 Hz
Power rating	600 W
Speed	11000 min ⁻¹
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight gross weight	1.9 kg 2.4 kg
Packing dimensions	325 x 128 x 115 mm
Packaging unit	6
Article number	44.305.50
EAN code	

ANGLE GRINDER
RT-AG 125/1



Mains connection	230 V ~ 50 Hz
Power rating	1010 W
Speed	12000 min ⁻¹
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight gross weight	2.3 kg 3.0 kg
Packing dimensions	420 x 138 x 115 mm
Packaging unit	6
Article number	44.305.60
EAN code	



Disc guard quick adjust



Cable clip



Disc guard quick adjust



Spindle lock



Soft grip



Key in additional handle



Soft grip



Key in additional handle

ANGLE GRINDER
TE-AG 230/2000

ANGLE GRINDER
RT-AG 230



Mains connection	230 V ~ 50 Hz
Power rating	2000 W
Speed	6500 min ⁻¹
Disc diameter	230 mm
Standard accessories	Key

Mains connection	230 V ~ 50 Hz
Power rating	2300 W
Speed	6600 min ⁻¹
Disc diameter	230 mm
Standard accessories	Key

Cutting disc not included

Cutting disc not included

Net weight gross weight	5.9 kg 6.8 kg
Packing dimensions	540 x 140 x 160 mm
Packaging unit	2
Article number	44.308.40
EAN code	

Net weight gross weight	5.9 kg 6.8 kg
Packing dimensions	540 x 140 x 160 mm
Packaging unit	2
Article number	44.305.70
EAN code	

4 006825 593419

4 006825 537291



Toolless disc guard adjustment



Soft start



Toolless disc guard adjustment



Soft start



Soft grip



Cable clip



Soft grip



Cable clip

ANGLE GRINDER
TE-AG 115/600

ANGLE GRINDER
TE-AG 115



Mains connection	230 V ~ 50 Hz
Power rating	600 W
Speed	11000 min ⁻¹
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)

Mains connection	230 V ~ 50 Hz
Power rating	720 W
Speed	11000 min ⁻¹
Disc diameter	115 mm
Standard accessories	Key (storage compartment in additional handle)

Cutting disc not included

Cutting disc not included

Net weight gross weight	1.9 kg 2.3 kg
Packing dimensions	325 x 130 x 125 mm
Packaging unit	6
Article number	44.308.55

Net weight gross weight	1.9 kg 2.3 kg
Packing dimensions	325 x 125 x 130 mm
Packaging unit	6
Article number	44.308.50

EAN code



EAN code




4 006825 593402

4 006825 577211



Disc guard quick adjust



Cable clip



Disc guard quick adjust




Cable clip



Soft grip



Key in additional handle



Soft grip



Key in additional handle

ANGLE GRINDER
TE-AG 125/750



Mains connection	230 V ~ 50 Hz
Power rating	750 W
Speed	11000 min ⁻¹
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)

Cutting disc not included

Net weight gross weight	2.1 kg 2.6 kg
Packing dimensions	335 x 145 x 120 mm
Packaging unit	4
Article number	44.308.80
EAN code	

4 006825 583267

ANGLE GRINDER
TE-AG 125/750 KIT



Mains connection	230 V ~ 50 Hz
Power rating	750 W
Speed	11000 min ⁻¹
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle), diamond cutting disc, safety guard for cutting, case

Net weight gross weight	2.1 kg 4.2 kg
Packing dimensions	385 x 200 x 130 mm
Packaging unit	4
Article number	44.308.85
EAN code	

4 006825 589832



Disc guard quick adjust



Flat metal gear head



Disc guard quick adjust




Flat metal gear head



Soft grip



Key in additional handle



Soft grip




Key in additional handle



ANGLE GRINDER
WITH CONSTANT ELECTRONIC CONTROL SYSTEM

TE-AG 125 CE



Mains connection	230 V ~ 50 Hz
Power rating	1100 W
Speed	3000 – 11000 min ⁻¹
Disc diameter	125 mm
Standard accessories	Key (storage compartment in additional handle)
	Cutting disc not included
Net weight gross weight	2.5 kg 3.0 kg
Packing dimensions	440 x 140 x 125 mm
Packaging unit	6
Article number	44.308.60
EAN code	 4 006825 577228




Constant electronics



Disc guard quick adjust



Slim design



Softgrip und cable clip

ANGLE GRINDER
TE-AG 230



Mains connection	230 V ~ 50 Hz
Power rating	2350 W
Speed	6500 min ⁻¹
Disc diameter	230 mm
Standard accessories	Key Cutting disc not included
Net weight gross weight	5.4 kg 6.8 kg
Packing dimensions	565 x 125 x 183 mm
Packaging unit	2
Article number	44.308.70
EAN code	

MASONRY CHANNEL CUTTER
TH-MA 1300



Mains connection	230 V ~ 50 Hz
Power rating	1320 W
Speed	9000 min ⁻¹
Cutting disc	Ø 125 x Ø 22,2 mm
Slot depth / Slot width	8 – 30 mm / 8 – 26 mm
Standard accessories	Key for changing disc
Net weight gross weight	5.1 kg 5.5 kg
Packing dimensions	405 x 240 x 295 mm
Packaging unit	3
Article number	43.507.30
EAN code	



Disc guard quick adjust




Softstart



Suitable for plaster, brickwork, aerated concrete and plasterboard



Dust emissions greatly reduced

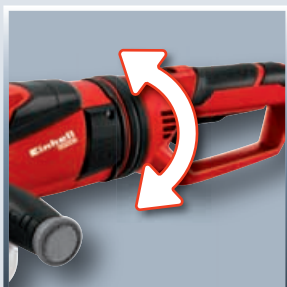


Adjustable main grip



Anti-vibration main grip and soft grip



Overload protected

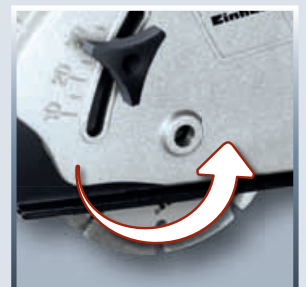

Soft start

ROUTER
TH-RO 1100 E



Mains connection	230 – 240 V ~ 50 Hz
Power rating	1100 W
Speed	11000 – 30000 min ⁻¹
Stroke height	55 mm
Clamp	6 and 8 mm
Standard accessories	Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, transparent guard

Net weight gross weight	3.7 kg 4.1 kg
Packing dimensions	290 x 230 x 145 mm
Packaging unit	4
Article number	43.504.70
EAN code	

ROUTER
RT-RO 55



Mains connection	230 V ~ 50 Hz
Power rating	1200 W
Speed	11000 – 30000 min ⁻¹
Stroke height	55 mm
Clamp	6 and 8 mm
Standard accessories	Parallel guide, compass, copy sleeve, key, clamp (6/8 mm), dust extraction adapter, transparent guard

Net weight gross weight	3.2 kg 4.4 kg
Packing dimensions	280 x 278 x 172 mm
Packaging unit	4
Article number	43.504.90
EAN code	



Chip shield



Precision depth adjustment




Chip shield



Precision depth adjustment with revolver stop




Depth adjustment with revolver stop

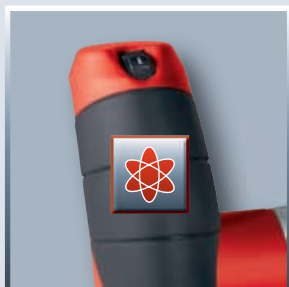

Speed control electronic



Soft grip



Cable clip



MULTIMAXX CORDLESS
RT-MG 10,8/1 Li




Battery pack	10.8 V; 1300 mAh Li-Ion
Oscillating speed	10000 – 34000 min ⁻¹
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3°
Charging time	1 h
Accessories	Saw blade, scraper, sanding disc, TCT cutting disc for tile gaps, 6 papers, fast charger, storage case

More information about this article:
 Scan in the QR code



Net weight gross weight	0.8 kg 2.1 kg
Packing dimensions	305 x 90 x 205 mm
Packaging unit	5
Article number	44.650.31
EAN code	



Comprehensive range of accessories



Velcro fastening for a quick change

 CONTROLLED	 ENERGY SAFE NO SELF-DISCHARGE
 NO MEMORY EFFECT CHARGE ANYTIME	 REPAIR MODE

1 h fast charger with Einhell Battery Management System





Speed control electronic

MULTIMAXX RT-MG 200 E



DE: rating "Very good"



Mains connection	230 V ~ 50 Hz
Power rating	200 W
Oscillating speed	30000 – 42000 min ⁻¹
Abrasive paper size	93 x 93 x 93 mm
Oscillating angle	3°
Accessories	2x saw blades (1x wood, 1x soft metal), scraper, sanding disc, 6 papers, dust extraction, storage case
More information about this article: Scan in the QR Code	
Net weight gross weight	1.2 kg 2.2 kg
Packing dimensions	365 x 115 x 285 mm
Packaging unit	5
Article number	44.650.40
EAN code	 4 006825 577204




Comprehensive range of accessories



Speed control electronics



Slim design

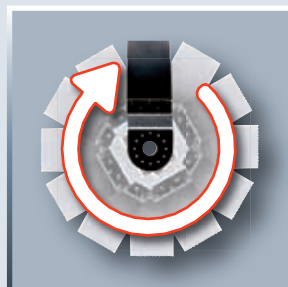

12 positions



Einhell Germany AG



STARTER KIT

for RT-MG 10,8 Li, RT-MG 10,8/1 Li,
RT-MG 200 E; 6 pieces
for wood and plastic, in parts for alu



Art. No. 44.650.10

PU 1

EAN code



DELTA SANDER
TH-DS 19



Mains connection	230 V ~ 50 Hz
Power rating	190 W
Vibrations	20000 min ⁻¹
Oscillating circuit	Ø 1.2 mm
Sanding area	90 x 90 x 90 mm
Abrasive paper size	93 x 93 x 93 mm
Standard accessories	3 abrasive papers (P 60, P80, P120), dust extraction adapter

Net weight gross weight	1.1 kg 1.4 kg
Packing dimensions	315 x 100 x 105 mm
Packaging unit	10
Article number	44.642.35
EAN code	



DELTA SANDER
TE-DS 20 E



Mains connection	230 V ~ 50 Hz
Power rating	200 W
Vibrations	13000 – 20000 min ⁻¹
Oscillating circuit	Ø 2.0 mm
Sanding area	90 x 90 x 90 mm
Abrasive paper size	93 x 93 x 93 mm
Standard accessories	10 abrasive papers (5 x P 80, 5 x P 120), dust extraction adapter

Net weight gross weight	1.2 kg 1.5 kg
Packing dimensions	350 x 108 x 95 mm
Packaging unit	10
Article number	44.642.50
EAN code	



Velcro fastening for a quick change



Ergonomic and slim design



Perfect ergonomics and low vibrations



Soft grip



Long durability



Incl. 3 abrasive papers



With Velcro fastening for standard abrasive paper



Speed control electronic

MULTI SANDER
TH-OS 1016



Mains connection	230 V ~ 50 Hz
Power rating	100 W
Vibrations	24000 min ⁻¹
Oscillating circuit	Ø 1.6 mm
Sanding area	104 cm ²
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	1 abrasive paper (P120), dust collection bag

Net weight gross weight	1.0 kg 1.2 kg
Packing dimensions	200 x 145 x 120 mm
Packaging unit	10
Article number	44.606.10
EAN code	

4 006825 592481

MULTI SANDER
RT-OS 13



Mains connection	230 V ~ 50 Hz
Power rating	130 W
Vibrations	24000 min ⁻¹
Oscillating circuit	Ø 2.0 mm
Sanding area	104 cm ²
Abrasive paper size	150 x 150 x 100 mm
Standard accessories	6 abrasive papers (3x P120, 3x P240), dust extractor adapter, dust collection box

Net weight gross weight	1.2 kg 1.6 kg
Packing dimensions	240 x 145 x 110 mm
Packaging unit	10
Article number	44.605.60
EAN code	

4 006825 573169



Velcro fastening for a quick change



Perfect ergonomics



Perfect ergonomics



Dust collection box with filter



Soft grip surfaces for comfortable handling



Low-dust operation



With Velcro fastening for standard abrasive paper



Soft grip and cable clip

MULTI SANDER
RT-XS 28



Mains connection	230 V ~ 50 Hz
Power rating	280 W
Vibrations	0 – 20000 min ⁻¹
Oscillating circuit	Ø 2.0 mm
Sanding area	Eccentric: Ø 125 mm Rectangle: 140 x 115 mm Delta: 174 x 105 mm
Standard accessories	Sanding disc (eccentric, delta, rectangle), 16 abrasive papers, dust extractor adapter, dust collection box with filter
Net weight gross weight	2.3 kg 2.8 kg
Packing dimensions	330 x 125 x 200 mm
Packaging unit	8
Article number	44.191.30
EAN code	


ORBITAL SANDER
TH-OS 1520



Mains connection	230 V ~ 50 Hz
Power rating	150 W
Vibrations	23000 min ⁻¹
Oscillating circuit	Ø 2.0 mm
Sanding area	187 x 90 mm
Abrasive paper size	230 x 93 mm (187 x 93 mm with Velcro)
Standard accessories	3 abrasive papers (P120)
Net weight gross weight	1.3 kg 1.5 kg
Packing dimensions	270 x 160 x 100 mm
Packaging unit	4
Article number	44.606.40
EAN code	



Changeable sanding disc

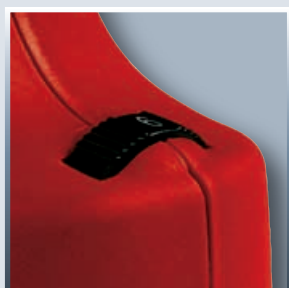

Speed control electronics



Universal paper-fixing system



XL grip areas



Dust collection box with filter



Adjustable additional handle



Compact easy-to-use design



Incl. dust extraction adapter

ORBITAL SANDER
TE-OS 2520 E



Mains connection	230 V ~ 50 Hz
Power rating	250 W
Vibrations	14000 – 24000 min ⁻¹
Oscillating circuit	Ø 2.0 mm
Sanding area	230 x 115 mm
Abrasive paper size	280 x 115 mm (230 x 115 mm with Velcro)
Standard accessories	1 abrasive paper (P120), transport and storage case, dust collection box
Net weight gross weight	1.9 kg 3.6 kg
Packing dimensions	410 x 190 x 138 mm
Packaging unit	4
Article number	44.606.20
EAN code	



Einhell Germany AG



Universal paper-fixing system



Robust aluminum sole plate



Compact easy-to-use design



Low-dust operation

ABRASIVE PAPER KIT
for RT-XS 28
20 pieces

Grit size:
Orbital Sander: 5 x 80 K, 5 x 120 K
Delta Sander: 5 x 80 K, 5 x 120 K



Art. No. 44.602.80

PU 1

EAN code



ECCENTRIC SANDER
TE-RS 40 E

BELT SANDER
TC-BS 8038




Mains connection	230 V ~ 50 Hz
Power rating	400 W
Vibrations	12000 – 24000 min ⁻¹
Oscillating circuit	Ø 2.5 mm
Sanding area	Ø 125 mm
Abrasive paper size	Ø 125 mm
Standard accessories	Dust collection box, transport and storage case

Mains connection	230 V ~ 50 Hz
Power rating	800 W
Belt speed	380 m/min
Sanding area	76 x 142 mm
Sanding belt size	76 x 533 mm
Standard accessories	1 sanding belt (P80), dust collection bag

Net weight gross weight	2.0 kg 2.3 kg
Packing dimensions	435 x 190 x 142 mm
Packaging unit	4
Article number	44.620.00
EAN code	


Net weight gross weight	3.4 kg 3.7 kg
Packing dimensions	370 x 155 x 173 mm
Packaging unit	6
Article number	44.662.60
EAN code	




Ergonomic hold with soft grip surfaces



Low-dust operation

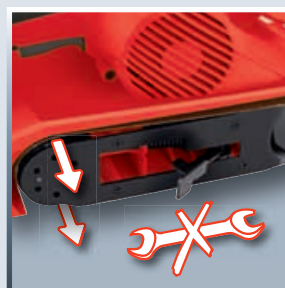

Easy tool-free belt change

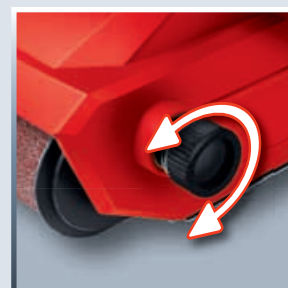

Precise belt adjustment



Durable sturdy construction



Rotary motion achieves a high rate of material removal



Ergonomically designed for a secure hold



Rotary motion achieves a high rate of material removal

BELT SANDER RT-BS 75



DE: best tool
of the year 2011



DE: rating "Good"




Mains connection	230 V ~ 50 Hz
Power rating	850 W
Belt speed	300 – 400 m/min
Sanding area	75 x 140 mm
Sanding belt size	75 x 533 mm
Standard accessories	Dust box, dust extractor adapter, sanding belt

Net weight gross weight	3.3 kg 3.8 kg
Packing dimensions	414 x 175 x 175 mm
Packaging unit	4
Article number	44.662.30
EAN code	




Einhell Germany AG

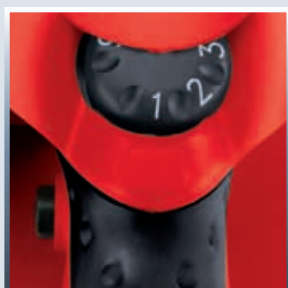

Variable belt speed



Folding front cover

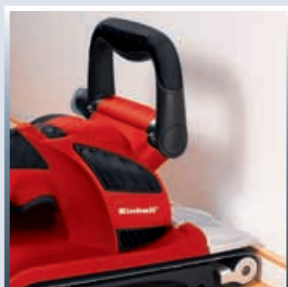

Adjustable additional handle



Dust collection box with filter

SET OF SANDING BELTS

for RT-BS 75, TC-BS 8038
75 x 533 mm
8 pieces: 2 x P 40, P 60, P 80, P 120



Art. No. 44.198.60

PU 1


EAN code






JIGSAW
TC-JS 60



Mains connection	230 V ~ 50 Hz
Power rating	410 W
Bevel cuts, max.	45°
Blade speed	500 – 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	60 / 10 / 6 mm
Pendulum action	–
Stroke height	18 mm
Standard accessories	1 saw blade, dust extraction adapter
Net weight gross weight	1.6 kg 1.9 kg
Packing dimensions	240 x 208 x 78 mm
Packaging unit	10
Article number	43.211.17
EAN code	 4 006825 599657


PENDULUM JIGSAW
TC-JS 80



Mains connection	230 V ~ 50 Hz
Power rating	600 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	80 / 20 / 10 mm
Pendulum action	4 levels (3 + 0)
Stroke height	18 mm
Standard accessories	1 saw blade, parallel guide, dust extraction adapter
Net weight gross weight	2.1 kg 2.6 kg
Packing dimensions	250 x 233 x 78 mm
Packaging unit	10
Article number	43.211.16
EAN code	 4 006825 599640




For sawing a range of materials

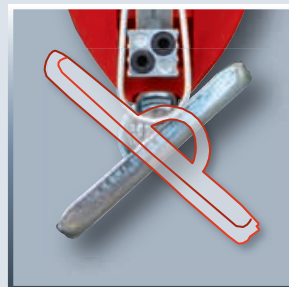

Versatile cutting up to 45°



Pendulum action ensures rapid sawing progress

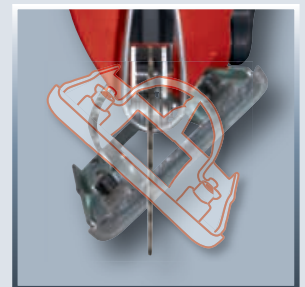

Versatile cutting up to 45°




Clear view of cutting area



XL grip areas



For sawing a range of materials

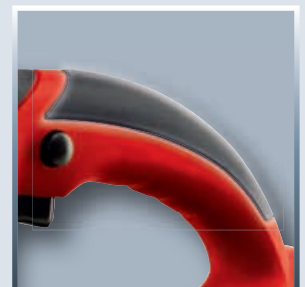

XL grip areas

PENDULUM JIGSAW


TH-JS 85




Mains connection	230 V ~ 50 Hz
Power rating	620 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	85 / 12 / 8 mm
Pendulum action	4-levels (3 + 0)
Stroke height	20 mm
Standard accessories	Parallel guide, dust extraction adapter, chip guard, removable workpiece guard, 1 saw blade, case
Net weight gross weight	2.0 kg 3.2 kg
Packing dimensions	340 x 286 x 98 mm
Packaging unit	6
Article number	43.211.40
EAN code	 4 006825 576573



Blade change without tools

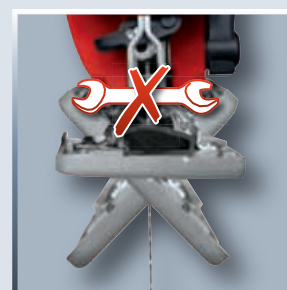

Adjustment without tools for bevel cuts up to 45°

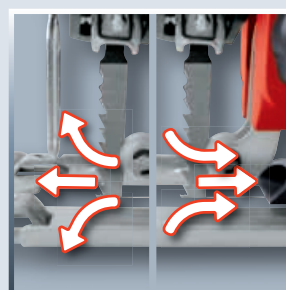

Chip blower function can be switched off



Removable workpiece guard



Note: For safe handling of the products please refer to the instructions in the operating manual.

RT-JS 85

TE-JS 100



Mains connection	230 V ~ 50 Hz
Power rating	750 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	85 / 12 / 8 mm
Pendulum action	4-levels (3 + 0)
Stroke height	23 mm
Standard accessories	Parallel guide, dust extractor adapter, 3 saw blades
Net weight gross weight	2.5 kg 3.0 kg
Packing dimensions	310 x 230 x 95 mm
Packaging unit	5
Article number	43.210.80
EAN code	




Mains connection	230 V ~ 50 Hz
Power rating	750 W
Bevel cuts, max.	45°
Blade speed	800 – 3000 min ⁻¹
Cutting depth (wood/plastic/steel)	100 / 12 / 10 mm
Pendulum action	4-levels (3 + 0)
Stroke height	23 mm
Standard accessories	Parallel guide, cutting line guide, chip guard, 1 saw blade, dust extraction adapter, carrying bag
Net weight gross weight	2.3 kg 3.8 kg
Packing dimensions	415 x 310 x 100 mm
Packaging unit	5
Article number	43.211.60
EAN code	




Saw blade depot



Blade change without tools

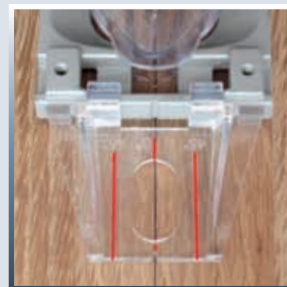

Removable cutting line guide

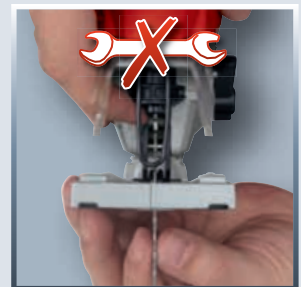

Universal blade holder without tools



Adjustment without tools for bevel cuts up to 45°



LED lamp



Adjustment without tools for bevel cuts up to 45°



LED lamp



ALL-PURPOSE SAW
TH-AP 650 €



Mains connection	230 – 240 V ~ 50 Hz
Power rating	650 W
Blade speed	500 – 3000 min ⁻¹
Cutting depth (wood/steel)	150 / 10 mm
Pendulum action	–
Stroke height	20 mm
Saw blade thickness	0.5 – 1.4 mm
Standard accessories	Saw blade for wood and metal
Net weight gross weight	2.8 kg 3.2 kg
Packing dimensions	490 x 180 x 80 mm
Packaging unit	5
Article number	43.261.41
EAN code	

ALL-PURPOSE SAW
RT-AP 1050 €




Mains connection	230 V ~ 50 Hz
Power rating	1050 W
Blade speed	0 – 2700 min ⁻¹
Cutting depth (wood/steel)	200 / 20 mm
Pendulum action	2-levels (1 + 0)
Stroke height	29 mm
Saw blade thickness	0.8 – 1.5 mm
Standard accessories	Saw blade for wood (150 mm length)
Net weight gross weight	3.8 kg 4.6 kg
Packing dimensions	545 x 235 x 98 mm
Packaging unit	4
Article number	43.261.35
EAN code	



Electronic stroke speed control



Ergonomic, slim design with soft grip

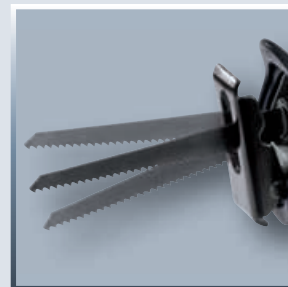

With pendulum action for rapid progress



Flexible due to turnable head




Blade change without tools



Toolless soleplate adjustment for optimum blade use



Blade change without tools

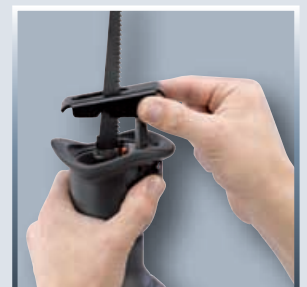

Toolless soleplate adjustment for optimum blade use



UNIVERSAL CIRCULAR SAW CUTMAXX

Cut whatever you like!

Whatever comes your way, with the new Cutmaxx you are always ideally equipped. A special carbide saw blade cuts steel, plastic and wood just as readily as plasterboard. With the supplied turbo diamond cutting wheel you can cut tiles, stone and even concrete without any effort. The diversity of uses is absolutely unique and operation with the two-hand operator control perfectly safe.

Watch the application videoclip and see for yourself.



UNIVERSAL CIRCULAR SAW CUTMAXX

TE-XC 110



Mains connection	230 V ~ 50 Hz
Power rating	730 W
Blade speed	4300 min ⁻¹
Cutting depth 90°	0 – 33 mm
Saw blade	Ø 110 x Ø 22.2 mm, t 24
Standard accessories	Turbo diamond cutting disc, universal TCT saw blade, parallel guide, dust extraction adapter, carrying bag
Net weight gross weight	3.0 kg 4.3 kg
Packing dimensions	420 x 235 x 270 mm
Packaging unit	2
Article number	43.310.00
EAN code	

TURBO DIAMOND CUTTING WHEEL

for TE-XC 110
Stone, tiles
Ø 110 x Ø 22.2 mm



Art. No. 45.020.16
PU 1
EAN code



For universal use



Dust enclosed motor

UNIVERSAL TCT SAW BLADE

for TE-XC 110
Plastic, steel, wood, gypsum
24 teeth | Ø 110 mm x Ø 22.2 mm



Art. No. 45.020.15
PU 1
EAN code




Robust rubber cable



Laser for precise cutting

HAND-HELD CIRCULAR SAW
TH-CS 1200/1

HAND-HELD CIRCULAR SAW
TH-CS 1400/1

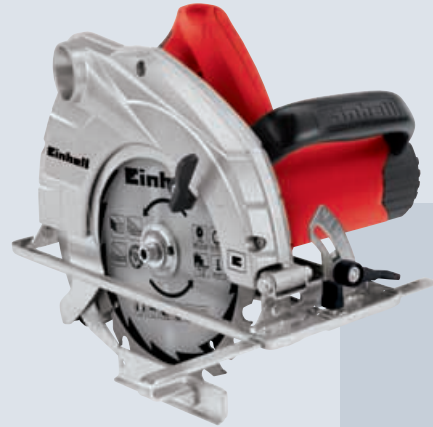


Mains connection	230 V ~ 50 Hz
Power rating	1230 W
Idling speed	5000 min ⁻¹
Cutting depth 90° / 45°	55 mm / 37 mm
Saw blade	Ø 160 x Ø 16 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade

Mains connection	230 V ~ 50 Hz
Power rating	1400 W
Idling speed	5200 min ⁻¹
Cutting depth 90° / 45°	66 mm / 45 mm
Saw blade	Ø 190 x Ø 30 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade

Net weight gross weight	3.7 kg 4.5 kg
Packing dimensions	348 x 257 x 248 mm
Packaging unit	4
Article number	43.309.36
EAN code	


Net weight gross weight	4.3 kg 5.2 kg
Packing dimensions	355 x 255 x 270 mm
Packaging unit	4
Article number	43.309.37
EAN code	

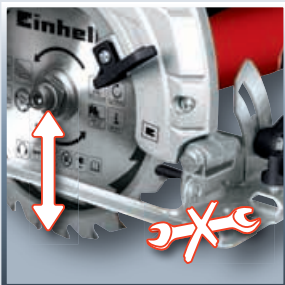


Toolless cutting depth adjustment




Angular cuts of up to 45°



Soft start

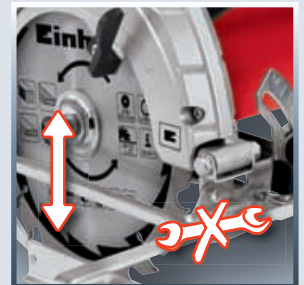

Toolless cutting depth adjustment




Ergonomic, large handle



Splitting wedge provides high level of user safety



Ergonomic, large handle

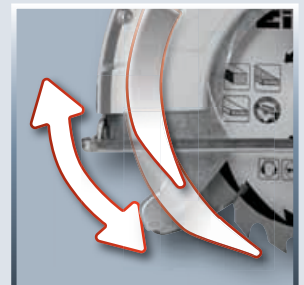


Splitting wedge provides high level of user safety



HAND-HELD CIRCULAR SAW

RT-CS 165



Mains connection	230 V ~ 50 Hz
Power rating	1200 W
Idling speed	5200 min ⁻¹
Cutting depth 90° / 45°	54 mm / 40 mm
Saw blade	Ø 165 x Ø 16 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade
Net weight gross weight	3.7 kg 5.0 kg
Packing dimensions	385 x 250 x 260 mm
Packaging unit	3
Article number	43.309.10
EAN code	 4 006825 537529



Large handle



Saw blade lock




Adjustment without tools
(cutting depth, bevel cut)



Quick opener

HAND-HELD CIRCULAR SAW
RT-CS 190/1




Mains connection	230 V ~ 50 Hz
Power rating	1500 W
Idling speed	5500 min ⁻¹
Cutting depth 90° / 45°	66 mm / 48 mm
Saw blade	Ø 190 x Ø 30 mm, t 24
Standard accessories	Parallel guide, key for changing the saw blade, dust extraction adapter
Net weight gross weight	5.2 kg 6.5 kg
Packing dimensions	405 x 275 x 280 mm
Packaging unit	2
Article number	43.309.70
EAN code	



LED illumination of the sawing point



Additional marking of the sawing line

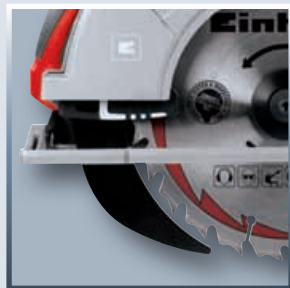

Splitting wedge provides high level of user safety



Compatible with Einhell guide bar system


EINHELL GUIDE BAR SYSTEM
 for RT-CS 190/1, 700 mm, 2 pieces



Art. No. 45.021.15
 PU 4
 EAN code



TCT SAW BLADE
 for RT-CS 190/1, RT-CS 190
 Z 24 | Ø 190 x Ø 30 x 2.5 mm



Art. No. 45.021.43
 PU 1
 EAN code



TCT SAW BLADE
 for RT-CS 190/1, RT-CS 190
 48 teeth | Ø 190 x Ø 30 x 2.5 mm



Art. No. 45.021.42
 PU 1
 EAN code





HOT AIR GUN
RT-HA 2000 €

GRINDING AND ENGRAVING TOOL
TH-MG 135 €



Mains connection	230 V ~ 50 Hz
Power rating	max. 2000 W
Air flow	1st setting: 150 to 500 l/min 2nd setting: 150 to 500 l/min 3rd setting: 500 l/min
Standard accessories	4 nozzles, 1 paint scraper
Net weight gross weight	0.7 kg 1.6 kg
Packing dimensions	260 x 90 x 270 mm
Packaging unit	8
Article number	45.201.90
EAN code	



Mains connection	230 V ~ 50 Hz
Power rating	135 W
Vibrations	10000 – 32000 min ⁻¹
Oscillating circuit	Ø 0.5 / 1.6 / 2.4 / 3.2 mm
Standard accessories	Case, flexible shaft 1 m, telescopic stand rod, 189 pcs. accessory set for drilling, polishing, grinding, cutting and milling
Net weight gross weight	0.7 kg 2.2 kg
Packing dimensions	340 x 218 x 125 mm
Packaging unit	6
Article number	44.191.69
EAN code	



Convenient operation



Safe stand in case of stationary operation



Speed control electronics



Spindle lock




Wide range of accessories




Cable clip



Soft grip

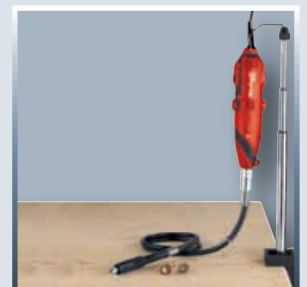

Telescopic stand rod and flexible shaft



Einhell Germany AG

We're always here to help – and that's a promise!
Is there anything you'd like to ask us about our products?
Would you like to order a part?
Your product isn't working as it should?

We're at your service!
We'll get you some help – fast and without any fuss.



**ISC GmbH, Eschenstr. 6,
94405 Landau/Isar, Deutschland**



+ 49 (0) 9951 959 2000



(Landline charge 14 cent/min.)
(Cell phone charge 42 cent/min.)

+ 49 (0) 1805 835 830



www isc-gmbh.info



info@isc-gmbh.info



Einhell Germany AG
Wiesenweg 22
94405 Landau/Isar
Germany

© 2014 Einhell Germany AG

Subject to technical
modifications and errors

www.einhell.com
info@einhell.com

Item no. 110160
As of: December 2013

Einhell